

RYK-2B97L2/1


20M Cable Management IR Camera

FEATURES

- Effio-E Platform
- 700 TV Line
- Support AWB, AGC, AES and DNR
- Built-in 24 Pieces IR-LED (up to 20M)
- Dual Window Structure
- 3-AXIS Concealed Cable Bracket
- Weatherproofing IP68



DIMENSIONS

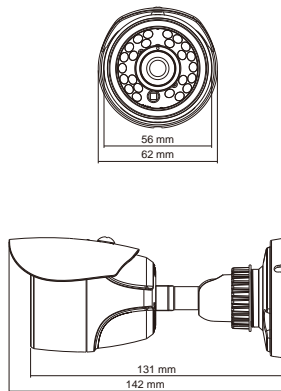

SPECIFICATIONS

Model No.	RYK-2B97L2/1	
Image Device	1/3" Color Sony Exview HAD II CCD	
Picture Elements	NTSC: 976x494, PAL: 976x582	
Resolution	700 TVL	
Min. Illumination	0.01 Lux @ F1.2	
S/N Ratio	More than 50dB	
Electronic Shutter	Auto: 1/50(60)~1/100,000	
Gamma	0.45	
Iris Control	Fixed	
Lens Furnished	Board Lens f 3.6mm / F2.0 (Optional : f= 4.3 / 6.0 / 12mm)	
Sync. System	1 Vp-p / 75 Ohms	
Power Supply	DC 12V±10%	
Power	IR On	310mA
Consumption	IR Off	110mA
Operating Temp.	-10°C ~ 50°C (14°F to 122°F)	

RYK-2B49L2/1, 2B79L2/1


20M Cable Management IR Camera

FEATURES

- 420~540TV Line
- Support AWB, AGC and AES
- Built-in 24 Pieces IR-LED (up to 20M)
- Dual Window Structure
- 3-AXIS Concealed Cable Bracket
- Weatherproofing IP68



DIMENSIONS

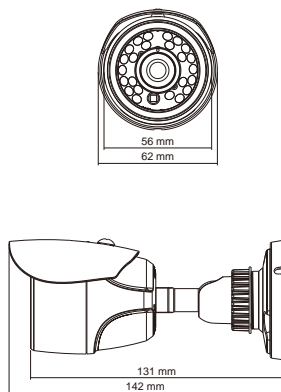

SPECIFICATIONS

Model No.	RYK-2B49L2/1	RYK-2B79L2/1
Image Device	1/3" Color Sony Super HAD II CCD	1/3" Color Hi-Res CCD
Picture Elements	NTSC: 510x492, PAL: 500x582	NTSC:768x494, PAL:752x582
Resolution	420 TVL	540 TVL
Min. Illumination	0.05 Lux @ F1.2 (IR Off)	0.1 Lux @ F1.2 (IR Off)
S/N Ratio	More than 48dB	
Electronic Shutter	Auto: 1/50(60)~1/100,000	
Gamma	0.45	
Iris Control	Fixed	
Lens Furnished	Board Lens f 3.6mm / F2.0 (Optional : f= 4.3 / 6.0 / 12mm)	
Sync. System	Internal	
Power Supply	DC 12V±10%	
Power	IR On	335mA
Consumption	IR Off	135mA
Operating Temp.	-10°C ~ 50°C (14°F to 122°F)	