

719 Electronic Siren (Self Contained)



- Economical
- Combination speaker and siren driver
- Dual tone: yelp and steady
- 6 to 12 VDC
- Small size – 127mm diameter
- Indoor or outdoor use
- Weather resistant, high impact construction
- 15 Watt power rating
- 115 db at 3m (12 volts)

How to Order:


719: Electronic Siren

742BE: Cabinet for 719, Beige

955WH: Tamper Switch

28-2: Bracket for tamper

744 Multi-Tone Siren Driver

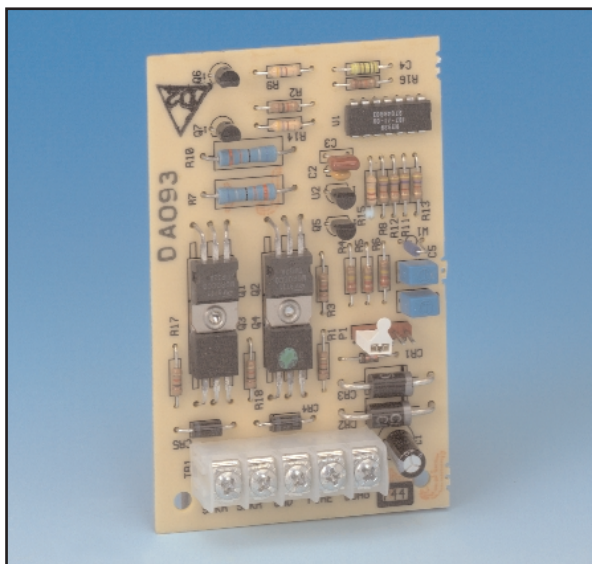

- 6 jumper-selectable tones
- Separate burglary and fire alarm sounds
- Highest output (119 db) in its category
- Compatible with ADEMCO 8-16 ohm speaker loads
- Powers many combinations of speakers (series, parallel, or series-parallel)
- Operates on 12VDC

Specifications:

Output Levels (with 8 ohm, 30 watt speaker):

- Warble Tone Output (at 1 metre): 119 dB
- Steady Tone Output (at 1 metre): 116 dB

Driver Current Consumption (at 12VDC):

- With 4 ohm speaker load: 2.5 amps
- With 8 ohm speaker load: 1.3 amps
- With 16 ohm speaker load: 0.9 amps

Sound Selections:

- Electronic "Bell" ■ Warble
- Slow Ramp ■ British Two-tone
- Fast Warble ■ Fast Dual tone

Dimensions: 67mm x 102mm x 19mm